
F-15

15MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY



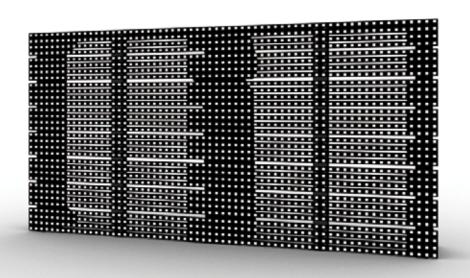

The F-15 offers a lightweight, virtually transparent high brightness LED display solution that is ideal for a wide array of applications, both indoor and out.

With an IP65 rating, F-15 offers a cost-efficient display solution with proven all-weather reliability!

Key benefits:


- ullet High performance and affordable ullet Enter new markets, greater ROI
- Lightweight \rightarrow Increases design possibilities/reduces costs
- Transparency → Combine video with lighting
- ullet Indoor/Outdoor ullet Greater ROI for rental companies
- ullet SMD LED ullet Quality image with wide viewing angles
- 5,000 NIT light output/IP65 rating \rightarrow Outdoor use
- Convex and concave display setup possibilities




F-15 SPECIFICATIONS*

15MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY

	F-15
Pixel pitch	15,625mm
Brightness (Nit or cd/m²)	5000 Calibrated
Transparency	13%
LED type /Brand	3 in 1 SMD
LED/Pixel	1
Module size (cm) W x H x D	100 x 50 x 16,1
Module size (ft) W x H x D	3.28 x 1.64 x 0.53
Module area	0,5m²/5.38ft²
Pixels / Module	64 x 32
Pixels / m²	4.096
Viewing Horizontal / Vertical	>140° / >140°
Weight/tile	15 kg / 33 Lbs
Weight/m²	30 kg / 66.14 Lbs
IP Front / Back	IP65 / IP54
Colors	4.4 Trillion
Processing	1.280 x 1.024
Input frequency	50/60 Hz
Refresh rate	>600Hz
Data interconnect	CAT 5
Processor	PA-15
Max power/tile (W)	480
Max power/m² (W)	960
Certificats	CE/UL
Temperature	-20 to 50°C / -4 to 122°F

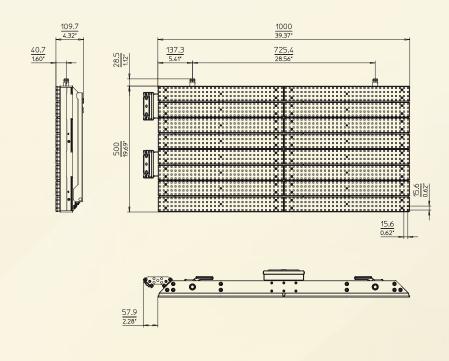



Email: info@pixled.com

