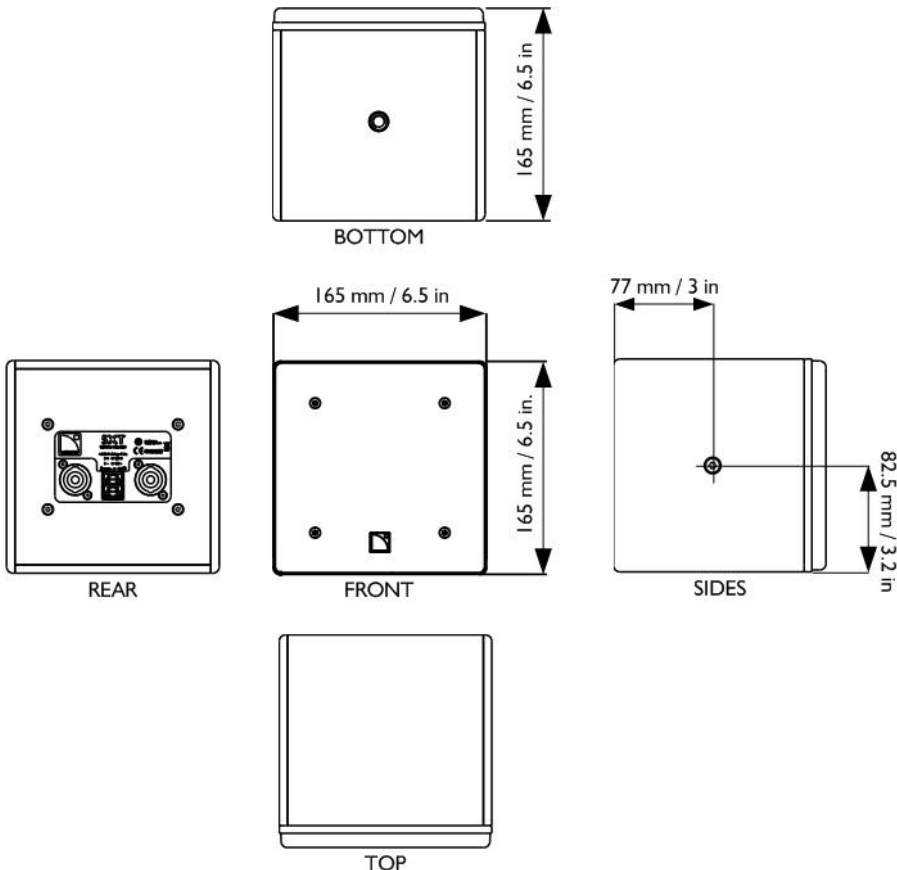


5XT SPECIFICATIONS

Description	2-way passive coaxial enclosure, amplified by LA4, LA4X or LA8	
Usable bandwidth (-10 dB)	95 Hz – 20 kHz ([5XT] preset)	
Maximum SPL ¹	121 dB ([5XT] preset)	
Coverage angle (-6 dB)	110° axi-symmetric	
Transducers	LF: 1 × 5" weather resistant, bass-reflex HF: 1 × 1" diaphragm compression driver	
Nominal impedance	16 Ω	
RMS power handling	85 W ([5XT] preset)	
Connectors	IN: 1 × 4-point SpeakON® LINK: 1 × 4-point SpeakON® IN/LINK: 2 × screw terminals	
Dimensions		
Rigging components	1 × 3/8" insert for microphone stand 2 × M6 inserts for ETR5 U-bracket	
Physical data	Weight (net): 3.5 kg / 7.7 lb Cabinet: baltic birch plywood Finish: Grayish Brown RAL 8019® or Pure White RAL 9010® Custom finish: RAL code on special order Rigging components and grill: steel with anti-corrosion coating	

¹ Peak level measured at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets)