



# AX5 TriplePAR™

Data sheet






## Optical

- Colours  
RGBAW
- Total LED power  
45W
- Luminous Flux  
1080Lm\*
- Emittance (@2m)  
4800Lx\*
- CRI  
92
- Strobe  
0-25Hz
- Beam Angle  
13°
- Pixels  
1

## Construction



- Housing  
Aluminium
- IP Rating  
IP65
- Relative humidity  
0-100%
- Operating Temperature  
0-40 °C  
32-104 °F
- Weight  
3.4kg
- Dimensions  
141 x 190 x 214 (mm)

## Accessories

-  IR remote control  
ARC1
-  32° Flood filter  
AX5-FF(included)
-  17°x 46° Wallwash filter  
AX5-WWF (Included)
-  Spigot (3/8" & 1/4"-20 threads)  
AX1-BLT
-  Charging case  
AX5-CHRSE

## Electrical

- Battery  
LG Chem Lithium-ion
- Battery Lifetime  
70% after 300 cycles
- LED Lifetime  
50.000 Hours
- Charging time (nominal)  
5 Hours
- Input Voltage  
90-264V 47-63Hz
- Input Current  
1.8A/115VAC ~ 1.0A/230VAC
- Inrush Current  
Cold start 30A/115VAC ~ 60A/230VAC

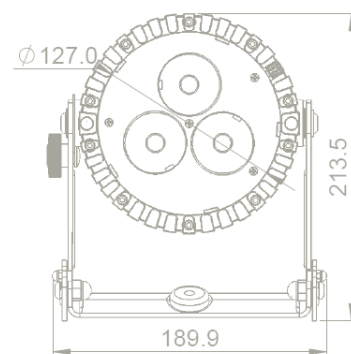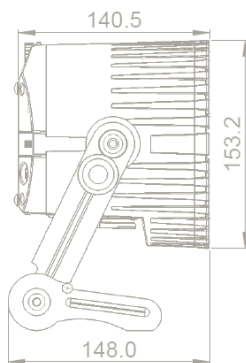

## Control

- Wireless Modules  
865-870MHz  
902-928MHz  
2.4GHz
- Range  
300m | 330 Yards
- DMX  
Supports CRMX, W-DMX and XLR-DMX

